


**Instructions for
P/N 5008 Retractable Lanyard Swivel
(SWIVEL OPTION 3)**


The swivel as received has a bolt with a hand tightened locknut on one side inserted through the end of the yoke and bolt with a locknut inserted through the yoke on the opposite side as illustrated.

Bolt with hand tightened Locknut

Bolt with Locknut



1. Unscrew the hand tightened locknut and remove the bolt from the yoke.
2. Attach the yoke to the desired anchorage.
3. Insert the bolt (5/16 -18 x 2" lg.) through the side of the yoke that is not threaded.

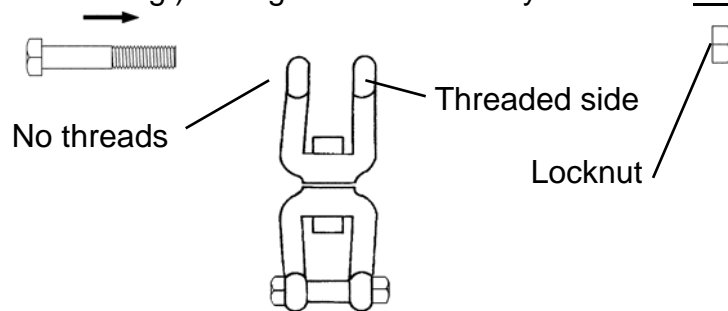

4. Screw the bolt into the threaded side of the yoke until the head of the bolt contacts the side of the swivel.
5. Thread the locknut onto the bolt end that protrudes from the yoke and tighten.
6. Cut off excess threaded portion of the bolt (approx. 3/16") that protrudes past the locknut. After cutting, peen the remainder of the threaded portion to prevent loosening of the nut and bolt.

