



# BUCKINGHAM MFG.

## INSTRUCTIONS / WARNINGS P/N 60007 Buck Tool Tether

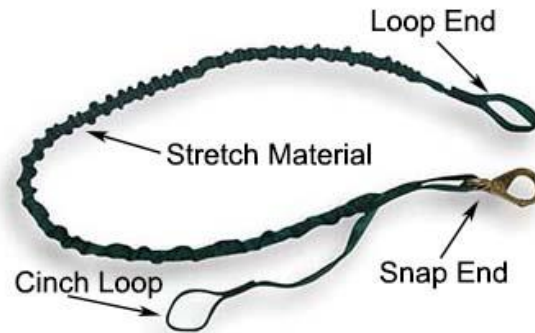

### ATTACHMENT

1. Using a girth hitch, attach the Loop End of the tether to a Body Belt Accessory Ring (Fig. 1).

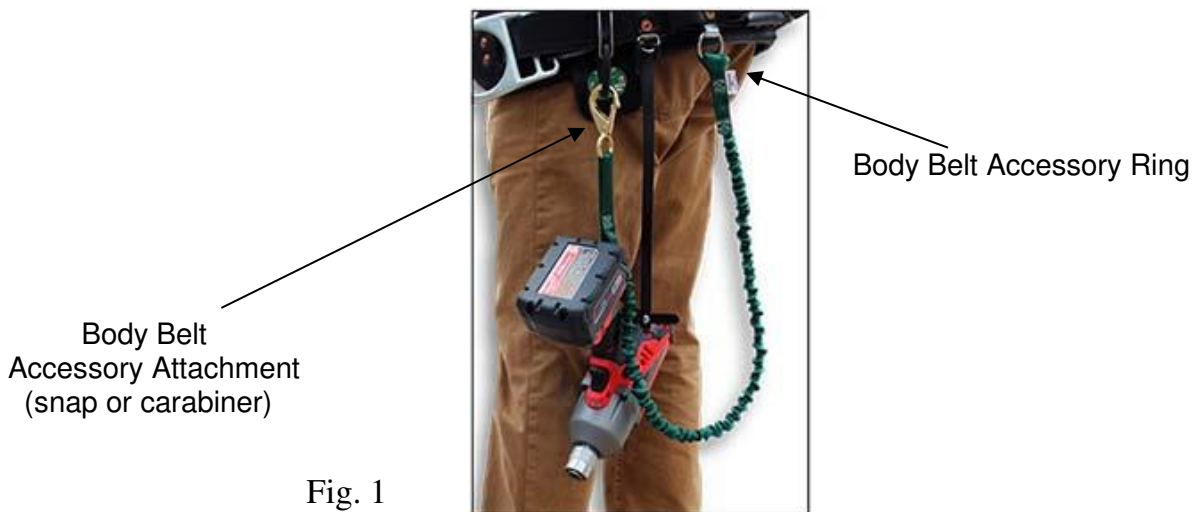

2. Using the Cinch Loop and the Snap End of the tether, make a girth hitch around the handle of the tool as shown in Fig. 2, 3, & 4.



Fig. 2



Fig. 3



Fig. 4

3. The brass snap of the tether may be used for attachment to the body belt accessory snap, or accessory carabiner, when not using or transporting tools (Fig.1).

## **WARNINGS**

- THIS PRODUCT IS NOT TO BE USED FOR PERSONAL FALL PROTECTION.
- For proper function, this product must not be used with a tool weighing more than 15 lbs. (4.8 kg).
- Dropping your tools is not recommended as it may cause damage to the unit.
- Remove unit from service, destroy, and discard if tool is dropped.
- Inspect for wear prior to each use.
- Do not use for human support.
- Do not use around moving or rotating equipment.
- Tether extends to a length of 5 1/2' (1.7 m). Rig to avoid contact with objects below.
- Ensure girth hitch remains snug while in use.
- Always attach the tether to your body belt accessory ring or accessory snap / carabiner. Never attach the tether to a work positioning or fall arrest D-ring.
- Do not attach tether back onto itself.
- Do not tie knots in tether.
- Do not rig so that the tether may interfere with or depress the trigger mechanism of the tool.

NOTE: Ensure proper fit / size of product before use. This product can not be returned unless it is in new / unused condition.

### **BUCKINGHAM MFG. CO., INC.**

BINGHAMTON, NY

1-800-937-2825

[www.buckinghammfg.com](http://www.buckinghammfg.com)

Information contained in these written instructions supersedes all other information (written, audio, video etc.) produced by Buckingham Mfg. prior to the revision date of this document.