


BUCKINGHAM MFG.

INSTALLATION INSTRUCTIONS FOR HARNESS EXTENSION STRAP (PIGTAIL)

HARNESS ATTACHMENT SHOWN BELOW

(FIGURE BELOW SHOWN FOR ILLUSTRATION PURPOSES; HARDWARE, WEBBING, LOOPS, AND FALL ARREST ATTACHMENT ELEMENT MAY VARY FROM THAT SHOWN.)

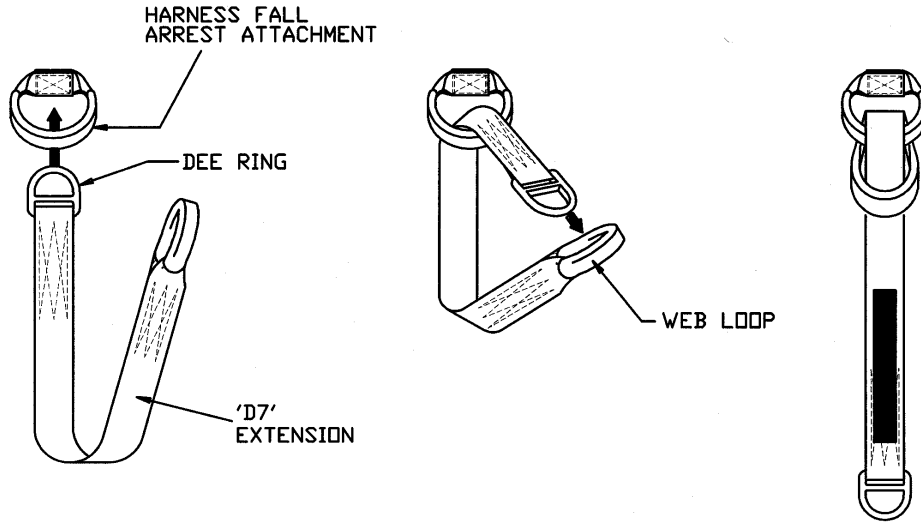

STEP 1

STEP 2

STEP 3

TO HITCH THE EXTENSION STRAP (PIGTAIL) TO THE HARNESS FALL ARREST ATTACHMENT ELEMENT:

NOTE: (IF CONNECTING TO FALL ARREST ATTACHMENT ELEMENT WITH HARDWARE INSTEAD OF HALF HITCH LOOP, SKIP TO STEP 4):

- STEP 1 - POSITION THE EXTENSION STRAP (PIGTAIL) AS SHOWN IN THE ABOVE SKETCH, PASS THE DEE RING UPWARD THROUGH THE HARNESS FALL ARREST ATTACHMENT ELEMENT.
- STEP 2 - PASS THE DEE RING THROUGH THE WEB LOOP ON THE OPPOSITE END OF THE EXTENSION STRAP (PIGTAIL).
- STEP 3 - PULL THE FREE END UNTIL THE EXTENSION STRAP (PIGTAIL) TIGHTENS AROUND THE FALL ARREST ATTACHMENT ELEMENT.
- STEP 4 – CONNECT HARDWARE TO THE FALL ARREST ATTACHMENT ELEMENT, AFTER CONNECTING, ALWAYS VISUALLY CHECK THAT HARDWARE (SNAPHOOK / CARABINER):
 - 1.) FREELY ENGAGES FALL ARREST ATTACHMENT ELEMENT.
 - 2.) KEEPER / GATE IS COMPLETELY CLOSED WITH EACH USE. NEVER RELY SOLELY ON THE FEEL OR SOUND OF A SNAPHOOK / CARABINER ENGAGING.
 - 3.) MAKE SURE HARDWARE (SNAPHOOK / CARABINER) IS POSITIONED SO THAT ITS KEEPER / GATE IS NEVER LOAD BEARING.
 - 4.) ENSURE THE HOOK FASTENER IS PROPERLY POSITIONED AWAY FROM THE USER'S BACK WHEN THE STRAP IS HANGING.

BEFORE USE, READ AND UNDERSTAND ALL INSTRUCTIONS AND WARNINGS INCLUDED WITH THIS AND OTHER PRODUCTS.

NOTE: Ensure proper fit of product before use. This product cannot be returned unless it is in new / unused condition.

BUCKINGHAM MFG. CO., INC.

BINGHAMTON, NY

1-800-937-2825

www.buckinghammfg.com