

OX BLOCK BUCKINGHAM





BUCKINGHAM
BUCK
1896

BUCKINGHAM MFG has proudly served industries with workers who climb wood poles, trees, towers and substation structures that support electricity, cable and telecommunications equipment for over 122 years. Whether for work above or below ground in these industries, we produce personal protection equipment and specialty tools for work positioning, retrieval, fall restraint, fall arrest and suspension

work applications. Most people do not think about the importance of work performed by those in this industry every day until the power goes out, the TV and computer stop working or a tree falls on a house or power line. Our customers maintain and restore services in all types of weather. This catalog is a tribute to these highly trained workers performing dangerous jobs with little recognition.

Buckingham MFG
1-11 Travis Avenue
Binghamton, NY 13904, USA

+1 800 937 2825

buckinghammfg.com

sales@buckinghammfg.com

facebook.com/buckinghammfg
instagram.com/buckingham_mfg
twitter.com/buckingham_mfg
youtube.com/buckmfg
google.com/+buckinghammfg

CONTENTS

*This mini catalog is a sampling of the thousands of products we manufacture.
For our full line, please visit BuckinghamMFG.com*

- 04** GREATER CONTROL
- 06** SPECS
- 08** ADDITIONAL CONFIGURATIONS
- 10** CONFIGURATIONS
- 11** OX BLOCK™ IN ACTION
- 12** BUCK BLOCKS
- 14** ULTIMATE OX KIT
- 16** HANDLINE ASSEMBLIES




HANDLE LOADS WITH GREATER CONTROL

The patented **OX BLOCK™** is a rope snatch block that features an integrated friction bar that can be used for hurtman rescue, lowering loads, snubbing loads, and raising heavy loads. It allows the rigging professional to handle loads with greater control. When lowering loads

force is transferred from the worker to the **OX BLOCK™**. The **OX BLOCK™**, with greater working load limits, is designed to replace standard handline blocks, parted blocks and various snatch blocks.

STANDARDS MET:

ASME B30 & CSA

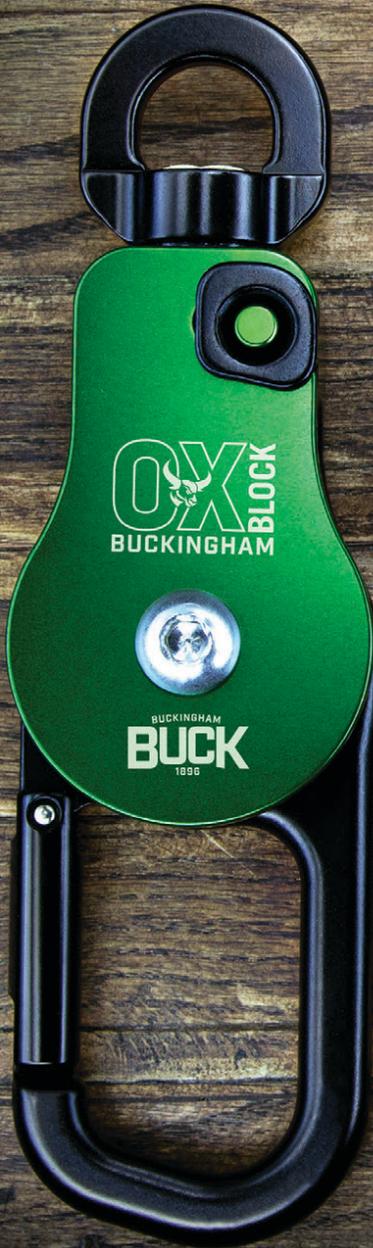

OX BLOCK™ w/Swivel Eye
(Patented)
50061
50061Q2 (CSA)



OX BLOCK™ w/Clevis Top
(Patented)
50062
50062Q2 (CSA)



Made in the USA



DESIGNED TO


SWIVEL EYE

WLL Eye to Sheave:
2500lbs


SWIVEL SIDE PLATE

INTEGRATED FRICTION BAR

WLL Eye to Friction Bar:
1500lbs

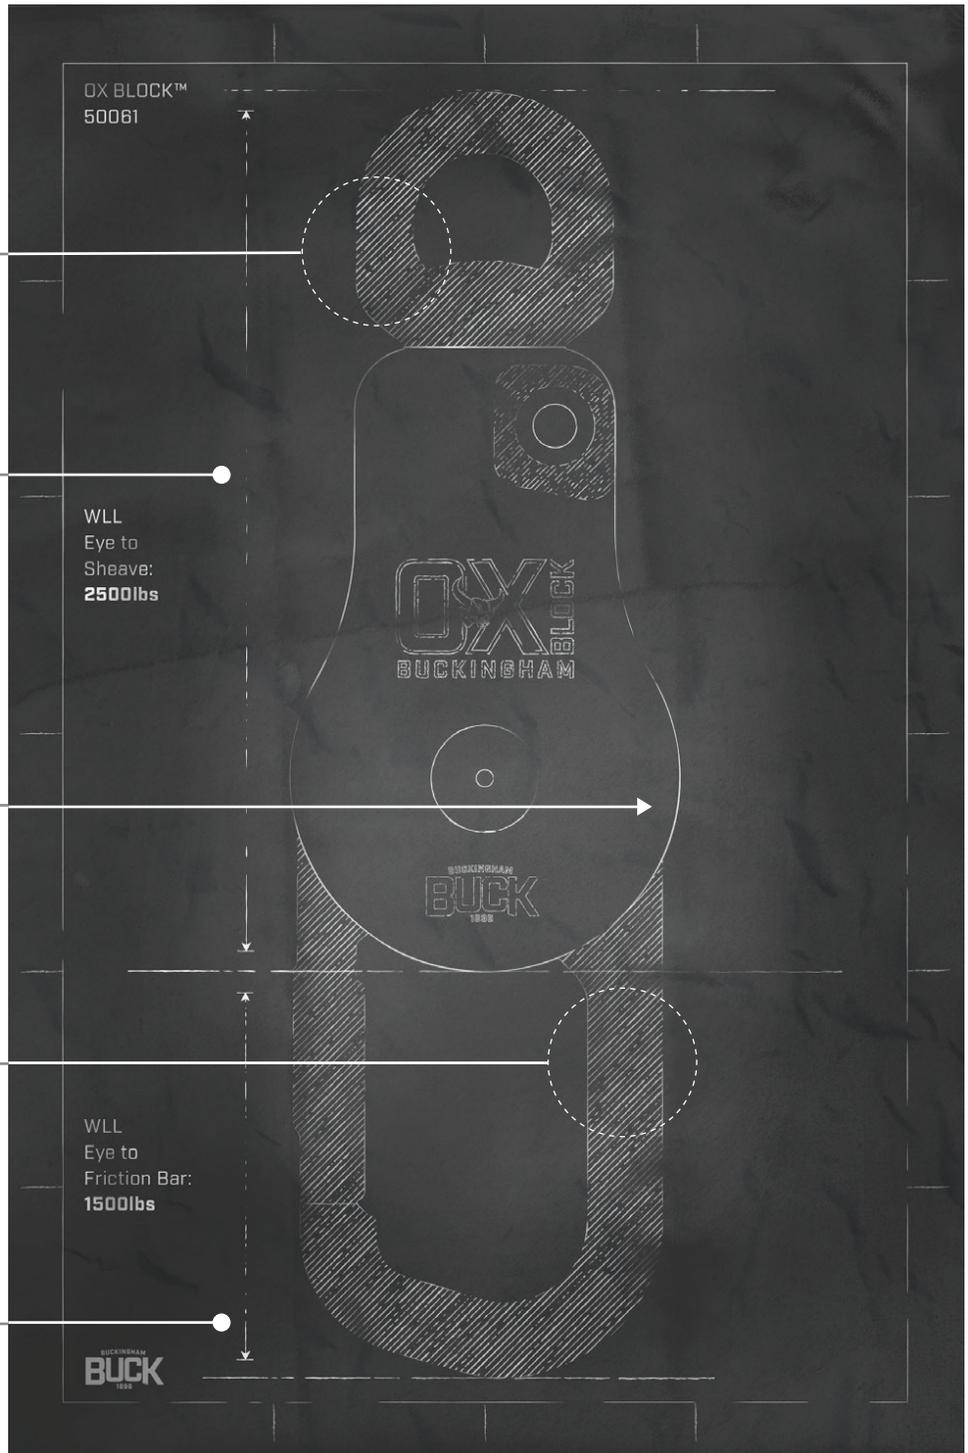

EASE THE LOAD

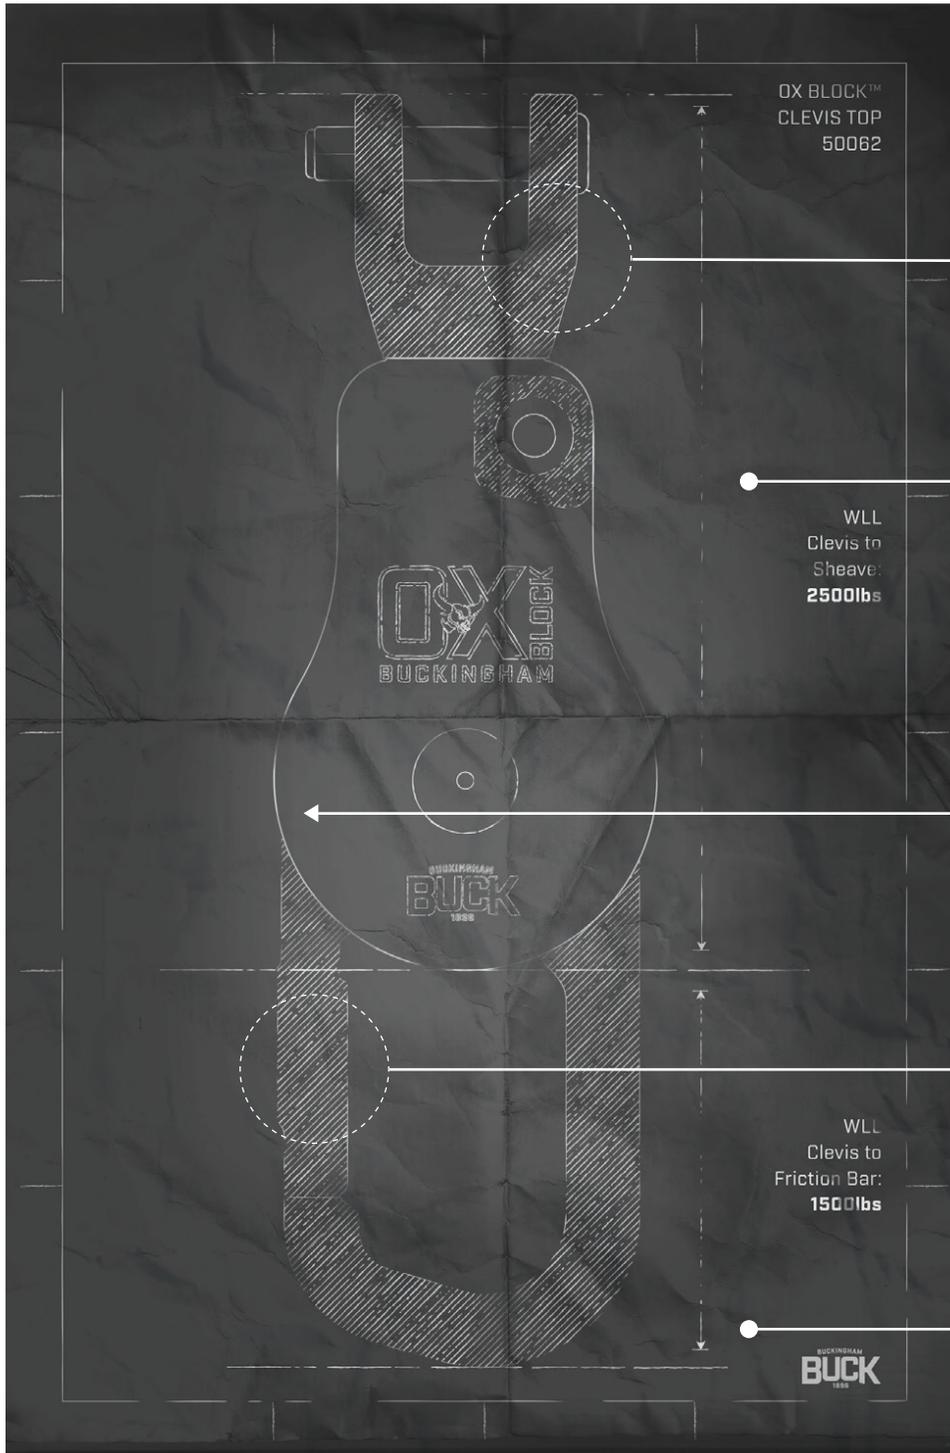

CLEVIS TOP
ALLOWS FOR EASY CHANGE
OF ACCESSORIES

WLL Clevis to Sheave:
2500lbs

WLL
Clevis to
Sheave:
2500lbs

SWIVEL SIDE PLATE

**INTEGRATED
FRICTION BAR**

WLL
Clevis to
Friction Bar:
1500lbs

WLL Clevis to Friction Bar:
1500lbs



Made in the USA


ADDITIONAL

OX BLOCK™ CONFIGURATIONS

OX BLOCK™ W/CLEVIS TOP & HOOK

50062C


This versatile design allows the user to customize the attachment options with authorized Buckingham accessories. The hook can also be attached directly to a suitable anchor point. Working load limit (hook to sheave): 2500lbs.

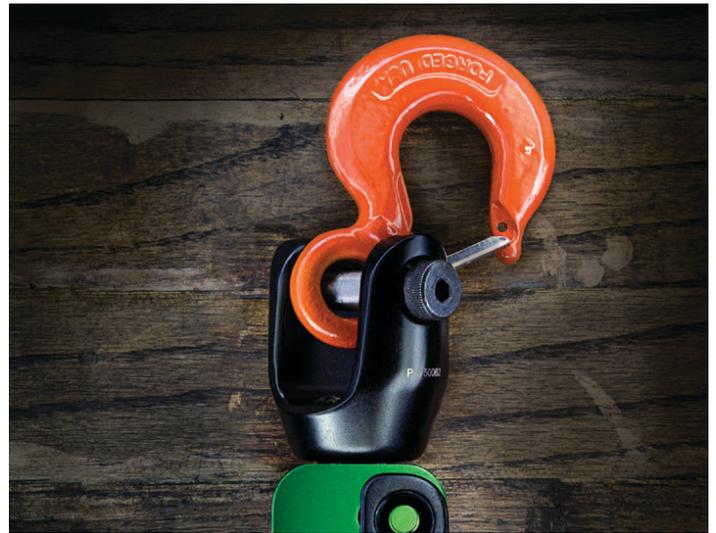

OX BLOCK™ W/CLEVIS TOP & OX HORN™

50062D

The OX BLOCK™ now features the new patented OX HORN™ with a 2" wide gate opening designed to replace non-rated "meat hooks." Gate locks open or closed. Working load limit, Ox Horn™ to Sheave (gate closed): 2500lbs. Working load limit, Ox Horn™ to sheave (gate open): 1000lbs.

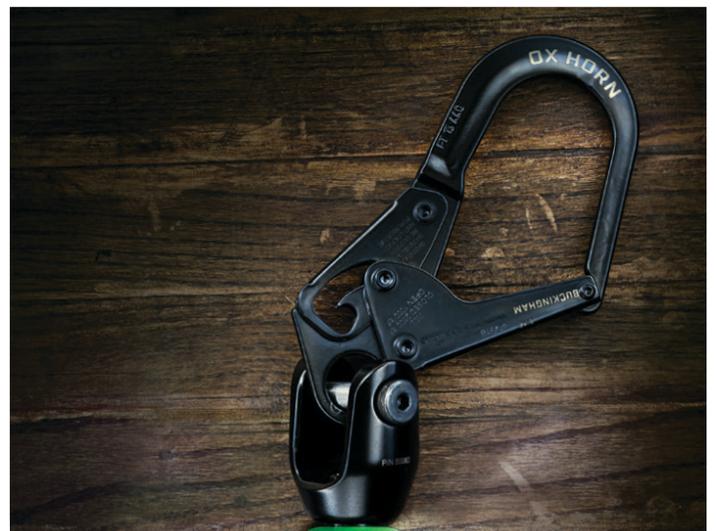

OX HOOK™

& OX HOOK SLIDE-R™

The patented OX HOOK™ can handle it all: light loads, heavy loads and even rescue!
Perfect for use with the OX BLOCK™.

WATCH THE VIDEO:

Watch the video at
[BuckinghamMFG.com/
videos](http://BuckinghamMFG.com/videos)

- Features a WLL of 2500lbs (gate closed) and 1000lbs (gate open)
- A 5000lb rating (when used for rescue) and a 3600lb rated gate, greatly reducing the time to get an injured victim to the ground (simply wrap, snap and cut)
- Gate can be locked in the open position and used like a traditional handline hook or can be locked closed to keep loads securely attached
- OX HOOK™ Handline Assembly includes a locking snap hook **1706** stitched on opposite end for added versatility
- See page 17 for Ox Hook™ handline assemblies

OX HOOK™ 2406S



CUSTOMER REVIEW:

"I never go anywhere without my Ox Block and Ox Horn."
—Journeyman Linemen

OX HOOK SLIDE-R™ KIT48

Allows the ground man to easily raise and lower loads while standing out away from the work area. Man rated pulley **RP110** (7000lbs) and triple action aluminum carabiner **5555S4** (6750lbs) can be used to perform a hurtman (skate) rescue from a pole or steel structure. Max weight when using OX HOOK SLIDE-R™ is 500lbs. See page 11 for working view.



NEW



Made in the USA

CONFIGURATIONS

FOR THE OX BLOCK™

When configured with optional pulleys, the patented OX BLOCK™ can be used to create a 2:1, 4:1 or 6:1 mechanical advantage reducing the amount of force needed to lift heavy loads. The benefit of the pulleys is that the swivel side plate allows for quick and easy rope installation without removing the pulley from the connecting device.

OX BLOCK™ Configurations


1. COMMON CONFIGURATION






2. HURTMAN RESCUE & LOWERING LOAD W/ FRICTION



3. SNUBBING LOAD

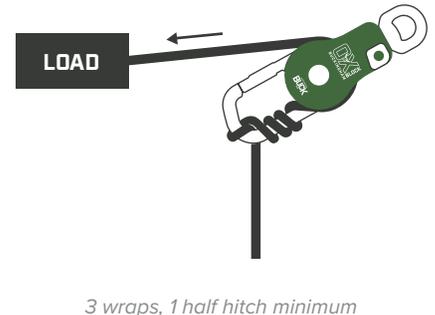

4. RAISING LOAD

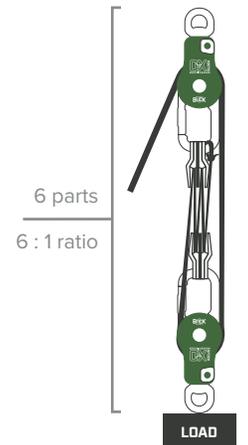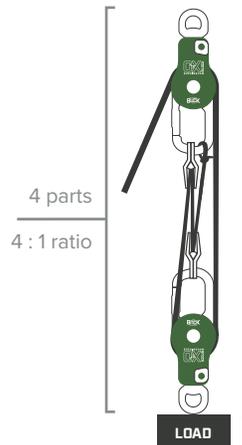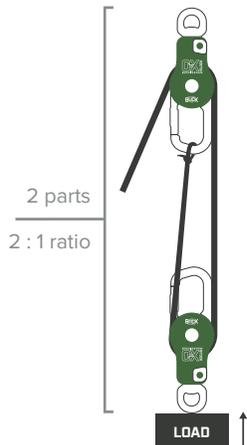

WATCH THE VIDEO:

Watch the video at
[BuckinghamMFG.com/
videos](http://BuckinghamMFG.com/videos)

THE OX BLOCK™ IN ACTION

RAISE IT / LOWER IT / SNUB IT / LOCK IT / SLIDE IT / HOOK IT / RESCUE IT

RAISE IT



RAISE IT




LOWER IT



SNUB IT



LOCK IT

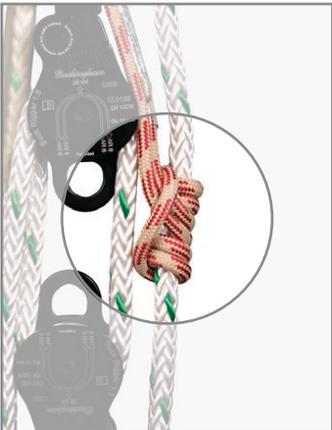

SLIDE IT



HOOK IT



RESCUE IT



Made in the USA

BUCK BLOCKS & ACCESSORIES



**Buck Side Swivel™
Single Sheave
50071B1**

Heavy duty aluminum pulley with a single side swivel plate and swivel eye. Side plates are ideal for use with progress capture Prusik. $\frac{5}{8}$ " rope capacity.
WLL: 2500lbf



**Buck Side Swivel™
Double Sheave
50071B2**

Heavy duty aluminum pulley with double side swivel plates and swivel eye. Side plates are ideal for use with progress capture Prusik. $\frac{5}{8}$ " rope capacity.
WLL: 2500lbf



**Buck Rigger™
Single Sheave
5007R1**

Single sheave pulley with a swivel side plate and swivel eye. $\frac{1}{2}$ " rope capacity.
WLL: 1800lbf



**Buck Rigger™
Double Sheave
5007R2**

Double sheave pulley with a swivel side plates and swivel eye. $\frac{1}{2}$ " rope capacity.
WLL: 1800lbf



**Cleviss Side Swivel™
Single Sheave
50072B1**

Same features as the regular Buck Side Swivel™ with the added benefit of the cleviss top for additional attachment options and easier change out of accessories.
WLL: 2500lbf



**Cleviss Side Swivel™
Double Sheave
50072B2**

Same features as the Cleviss Side Swivel™ single sheave in a double sheave design.
WLL: 2500lbf



Steel Triple Action Carabiner
5005S3

Steel triple action carabiner. Meets ANSI Z359.12 standards.
MBS 11,240lbs



10 MM Capture Prusik
705A1-36

10mm Prusik with an aluminum ring. Ideal for a progress capture when using Buck Side Swivels™ as mechanical advantage.



OX TAIL™
39078TAG1-4
39078TAG1-7

4' x 5/8" adjustable sling.
7' x 5/8" adjustable sling.
WLL:
Straight 3200lbf,
Choker 2560lbf,
Basket 6400lbf



30" 8MM Progress Capture Prusik
P9J8V-10-30S

A 30" eye to eye Prusik made of 8mm Dyneema rope.



BuckLink™ Sling
3903S-6

The BuckLink™ is made of lightweight Spectra material and each loop is rated to 5,000lbs. With 16 loops, users can adjust the BuckLink sling to form a rated anchor of any size.



OX HORN
31291B

2" gate opening, Designed to replace a non-rated "meat hook" used by linemen. WLL of 2500lbs with gate closed. 1000lbs WLL with gate open. For use on the Ox Block™ with a clevis top. Patented.



OX HOOK™
2406S

Features a 3600lbf rated locking gate making rescue situations more efficient. WLL of 2500lbs with gate closed. 1000lbs WLL with gate open. Patented.



Large RopePro™ Deluxe Bag
4374

Water resistant with rope access port in the lid. Ventilation panels provide air circulation. Holds up to 250' of rope. Measures 16"H x 14"W x 16"D.

NEW



Gated Handline Carrier
2402G

Gate keeps handline or tools securely stored while climbing or working. Straightens when approx. 25lbs pressure applied, allowing the handline to pull free.



Heavy Duty Gated Handline Carrier
2402GH

Designed to breakaway when approx. 33lbs of pressure is applied. The gate closed breakaway strength increases by 10lbs.



Buck Mini Equipment Bag
506G4P7-14

Heavy Cordura nylon with heavy duty zipper closure. 1" nylon web carry handles. 2 outside pockets with closure snaps. Measures 10"H x 7"W x 10"D.



Mesh Equipment Bag
45400G10-9

Allows airflow pass for equipment to dry while being stowed. Extremely lightweight. Measures 9"L x 5"W x 5"D. See BuckinghamMFG.com for more sizes.



Made in the USA

ULTIMATE OX KIT

FULLY
CUSTOMIZABLE

50061K21

The Ultimate Ox Kit is a complete rigging system that puts numerous rigging options at the user's fingertips. For example, the user can create a 4-to-1 mechanical advantage on up to a 50' working height. Similarly, the user can create a 5-to-1 mechanical advantage on up to a 35' working height. The Ultimate Ox Kit fits in a small, self-contained bag and can be stored in the back of a truck with ease.

As with most of Buckingham Manufacturing's products, the Ultimate Ox Kit is completely customizable. Call customer service to customize or email sales@buckinghammfg.com.



OX BLOCK™ Swivel Eye & Carabiner w/4' Sling
50061A-4
Qty: 1



OX BLOCK™ Swivel Eye & Steel Triple Action Carabiners
50061B
Qty: 1



Buck Side Swivel Single Sheath
50071B1
Qty: 1



Buck Side Swivel Double Sheath
50071B2
Qty: 2



Rope Bag
4374
Qty: 1



250' Rope
255042
Qty: 1



8MM 16" Endless Loop
P9C8V-10-16S
Qty: 1



Steel Triple Action Carabiner
5005S3
Qty: 4



Prusik Loop w/Aluminum Ring
P9J8V+M-34
Qty: 1



BuckLink™ Sling
3903SQ1-6
Qty: 1

OX BLOCK™

W/BECKIES

The OX BLOCK™ is available with extra 4' or 7' (5/8" diameter) adjustable sling designed to be connected back to a non-locking hook or triple action steel carabiner. See page 12 for sling information and ratings.

OX BLOCK™ w/Clevis Top

50062AC-4

Hook and 4' adjustable sling.

50062AC-7

Hook and 7' adjustable sling.



OX BLOCK™ w/Swivel Eye

50061A-4

4' adjustable sling and triple action steel carabiner (5005S3).

50061A-7

7' adjustable sling and triple action steel carabiner (5005S3).



OX BLOCK™

HANDLINE ASSEMBLIES



MODEL NO.	ADJUSTABLE SLING	CARABINER (5005S3)	HANDLINE ASSEMBLY LENGTH
50061A-4/80	4'	X	80'
50061A-4/100	4'	X	100'
50061A-7/80	7'	X	80'
50061A-7/100	7'	X	100'

2406 handline hook not for human support.



MODEL NO.	ADJUSTABLE SLING	CLEVIS TOP & HOOK	HANDLINE ASSEMBLY LENGTH
50062AC-4/80	4'	X	80'
50062AC-4/100	4'	X	100'
50062AC-7/80	7'	X	80'
50062AC-7/100	7'	X	100'

2406 handline hook not for human support.

OX HOOK™

HANDLINE ASSEMBLIES



OX HOOK™ Handline Assembly

2406S-80

80' handline w/OX HOOK™ and 1706 locking snap hook.

2406S-100

100' handline w/OX HOOK™ and 1706 locking snap hook.



MODEL NO.	ADJUSTABLE SLING	CARABINER (5005S3)	HANDLINE ASSEMBLY LENGTH
50061K15-4/80	4'	X	80'
50061K15-4/100	4'	X	100'
50061K15-7/80	7'	X	80'
50061K15-7/100	7'	X	100'

2406 handline hook is for human support or material handling.



MODEL NO.	ADJUSTABLE SLING	CLEVIS TOP & HOOK	HANDLINE ASSEMBLY LENGTH
50062K14-4/80	4'	X	80'
50062K14-4/100	4'	X	100'
50062K14-7/80	7'	X	80'
50062K14-7/100	7'	X	100'

2406 handline hook is for human support or material handling.



Made in the USA

VISIT OUR WEBSITE

BuckinghamMFG.com

FOR TRAINING VIDEOS
ON MANY PRODUCTS & TECHNIQUES

OX BLOCK & THE OX FAMILY



OX Block® Overview ([DOWNLOAD](#))



TRAINING - OX Block® ([DOWNLOAD](#))



TRAINING - Ox Block® Pole Top Rescue ([DOWNLOAD](#))



TRAINING OX Block® Anchorage ([DOWNLOAD](#))




Introducing...The Ox Hook ([DOWNLOAD](#))




TRAINING - Ox Block Lift & Lower ([DOWNLOAD](#))




FOR OUR COMPLETE PRODUCT LINE

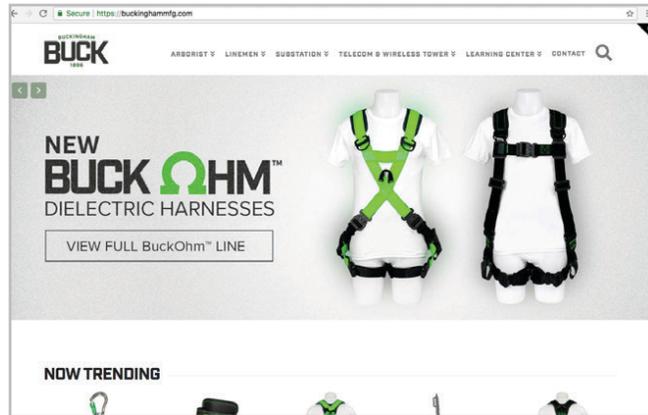


FOR MORE CATALOGS




**LINEMEN
MINI CATALOG**



**ARBORIST
MINI CATALOG**



**TOWER
MINI CATALOG**



**CABLE/TELECOM
MINI CATALOG**



**SUBSTATION
MINI CATALOG**



**NATE
MINI CATALOG**



**BUCK CSA
CATALOG**



Made in the USA

BUCKINGHAM
BUCK
1896